


innovate... laminate

The Easymount™ range provides a simple solution for professional, cost effective finishing

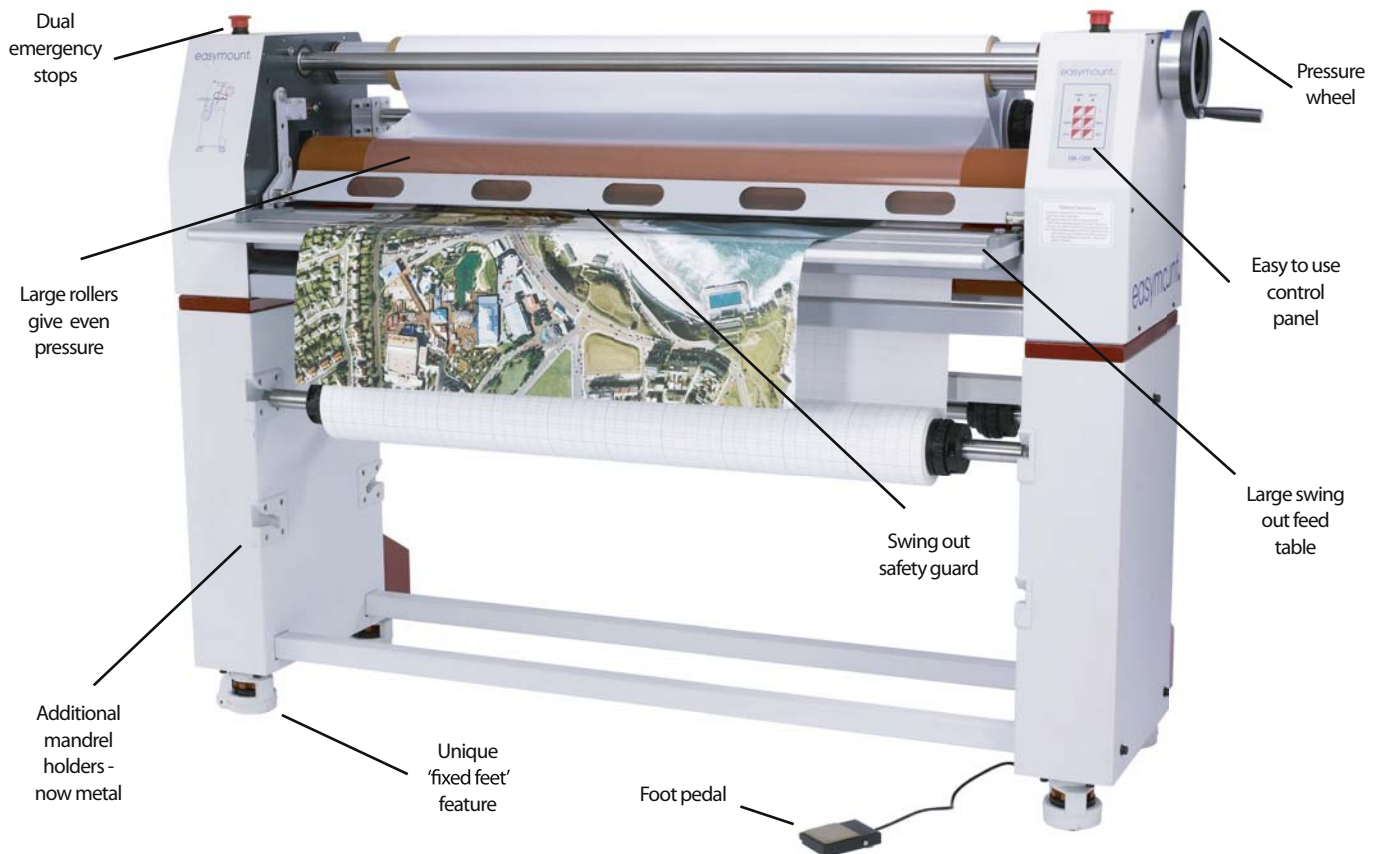

### Design

With advanced features and a new design, the Easymount™ is capable of delivering premium quality results for graphics and signage material.

### Performance

There are 6 models to choose from in the range, starting at 720mm up to 1880mm. The 1200, 1400 and 1600 are the most popular models and can competently produce a highly efficient output of up to 3 metres per minute.

### Enhancements

Many features have been enhanced on the wider models including additional mandrel holders for storing spare rolls and a larger swing out feed tray and safety guard for easy material loading.



Reverse Feature



Speed Control




#### IDEALLY SUITED FOR

- cold laminates
- mounting prints to boards
- applying vinyls
- application tapes
- applying adhesive films

and many more...

#### GREAT FOR USE IN

- commercial printers
- sign makers
- copy and print shops



ROLLER PRESSURE  
GAUGE



USER FRIENDLY  
CONTROL PANEL



LARGE SWING OUT  
FEED TRAY



MOTORISED TAKE UP  
UNIT\*

### FEATURES

- solid construction heavy-duty system
- 2 cold large diameter rollers
- release liner take-up
- adjustable rollers up to 25mm
- variable speed control
- no warm-up time required
- large rollers for even pressure
- handy reverse mechanism
- foot pedal for controlled operation
- low maintenance.

### NEW ENHANCEMENTS TO THE 1400 AND 1600 MODELS

- 50% faster - now up to 3m per minute
- additional mandrel holders for optional extra mandrels
- 'fixed feet' feature means castors can be easily adjusted - ideal if your floor surface is uneven
- larger swing out feed tray and safety guard making mounting onto board and loading materials hassle free
- width markings on metal mandrels for precise film loading
- pressure gauge on rollers, adjustable on machine to give even pressure every time.

\* This is an optional extra



EM-880 with Stand \*



EM-1400

### specifications

	EM-880	EM-1400	EM-1600	EM-1880
approx laminating speed (m/min)	2	3	3	2
maximum width (mm)	880	1400	1600	1880
mounting thickness (mm)	15	25	25	25
roller diameter (mm)	70	112	131	162
laminating temperature (°C)	cold	cold	cold	cold
speed control	keypad	keypad	keypad	keypad
pressure adjustment	manual	manual	manual	manual
film core (mm)	75	75	75	75
power supply AC (V-Hz)	220/240-50-60	220/240-50-60	220/240-50-60	220/240-50-60
power consumption (W)	50	70	70	150
dimensions (mm) with stand	1170 x 560 x 1190	1990 x 648 x 1248	2190 x 648 x 1257	2500 x 710 x 1290
weight (Kg)	52	176	197	745
warranty (year)	1	1	1	1